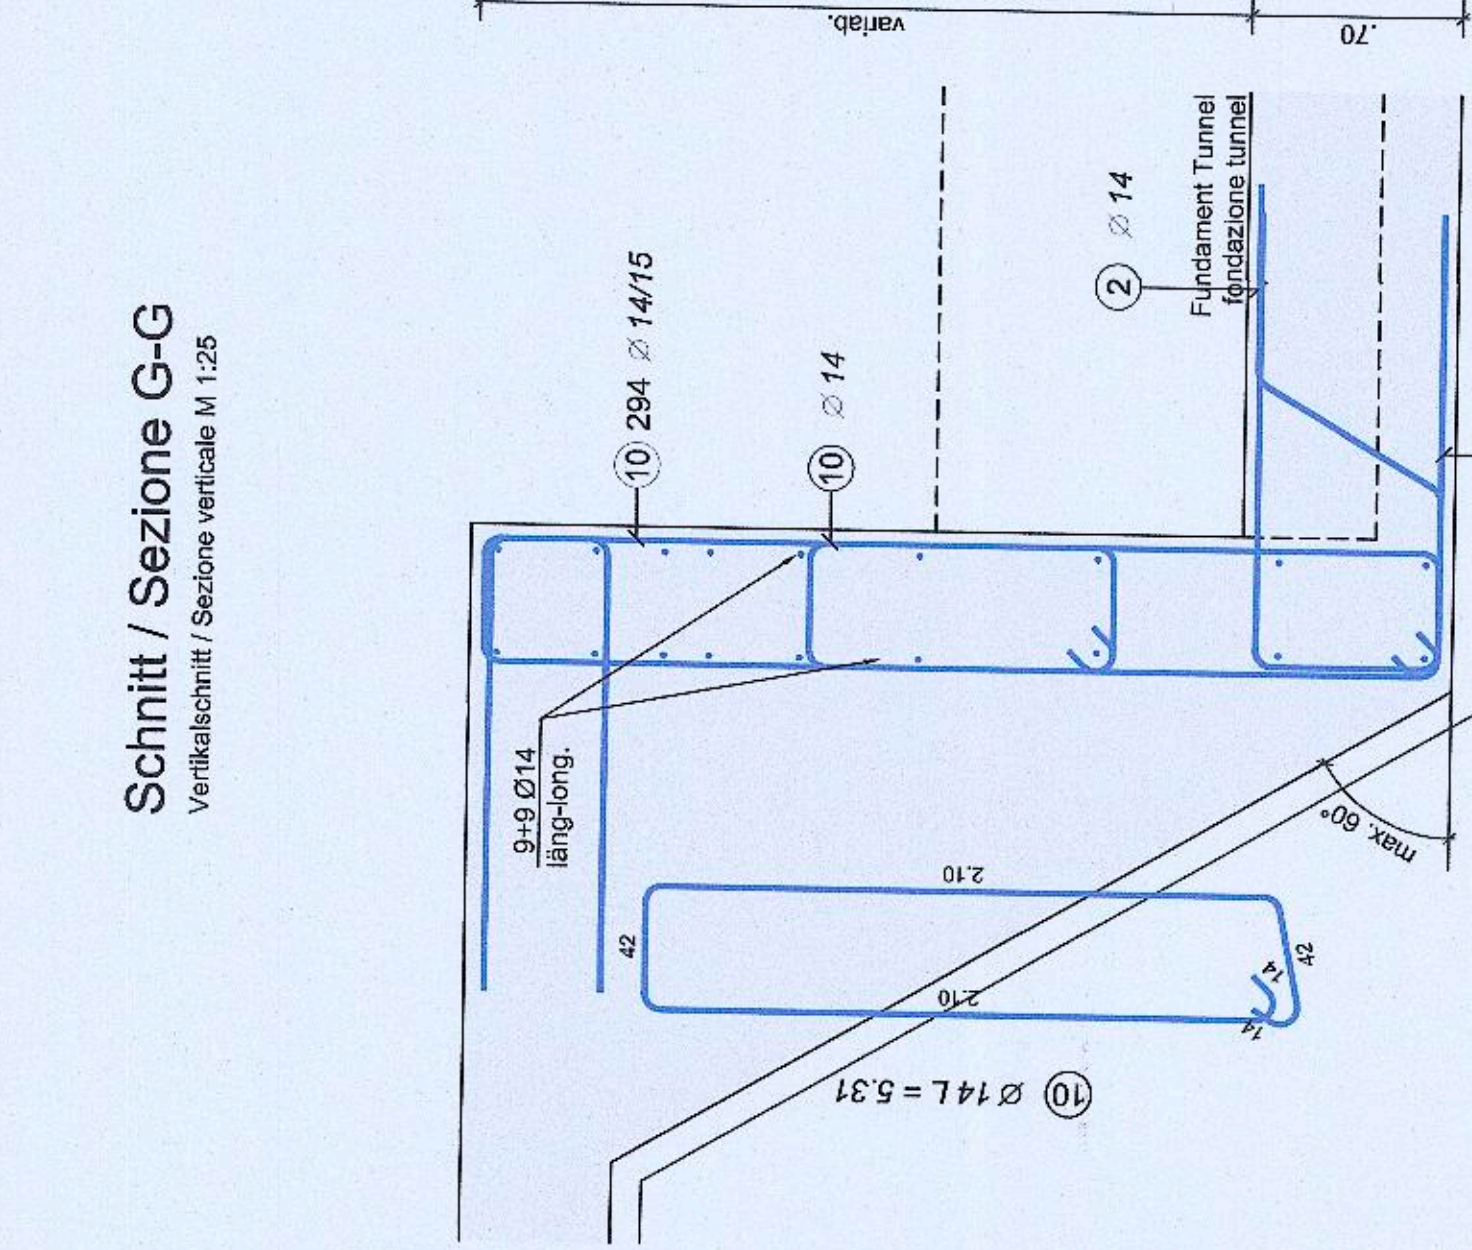
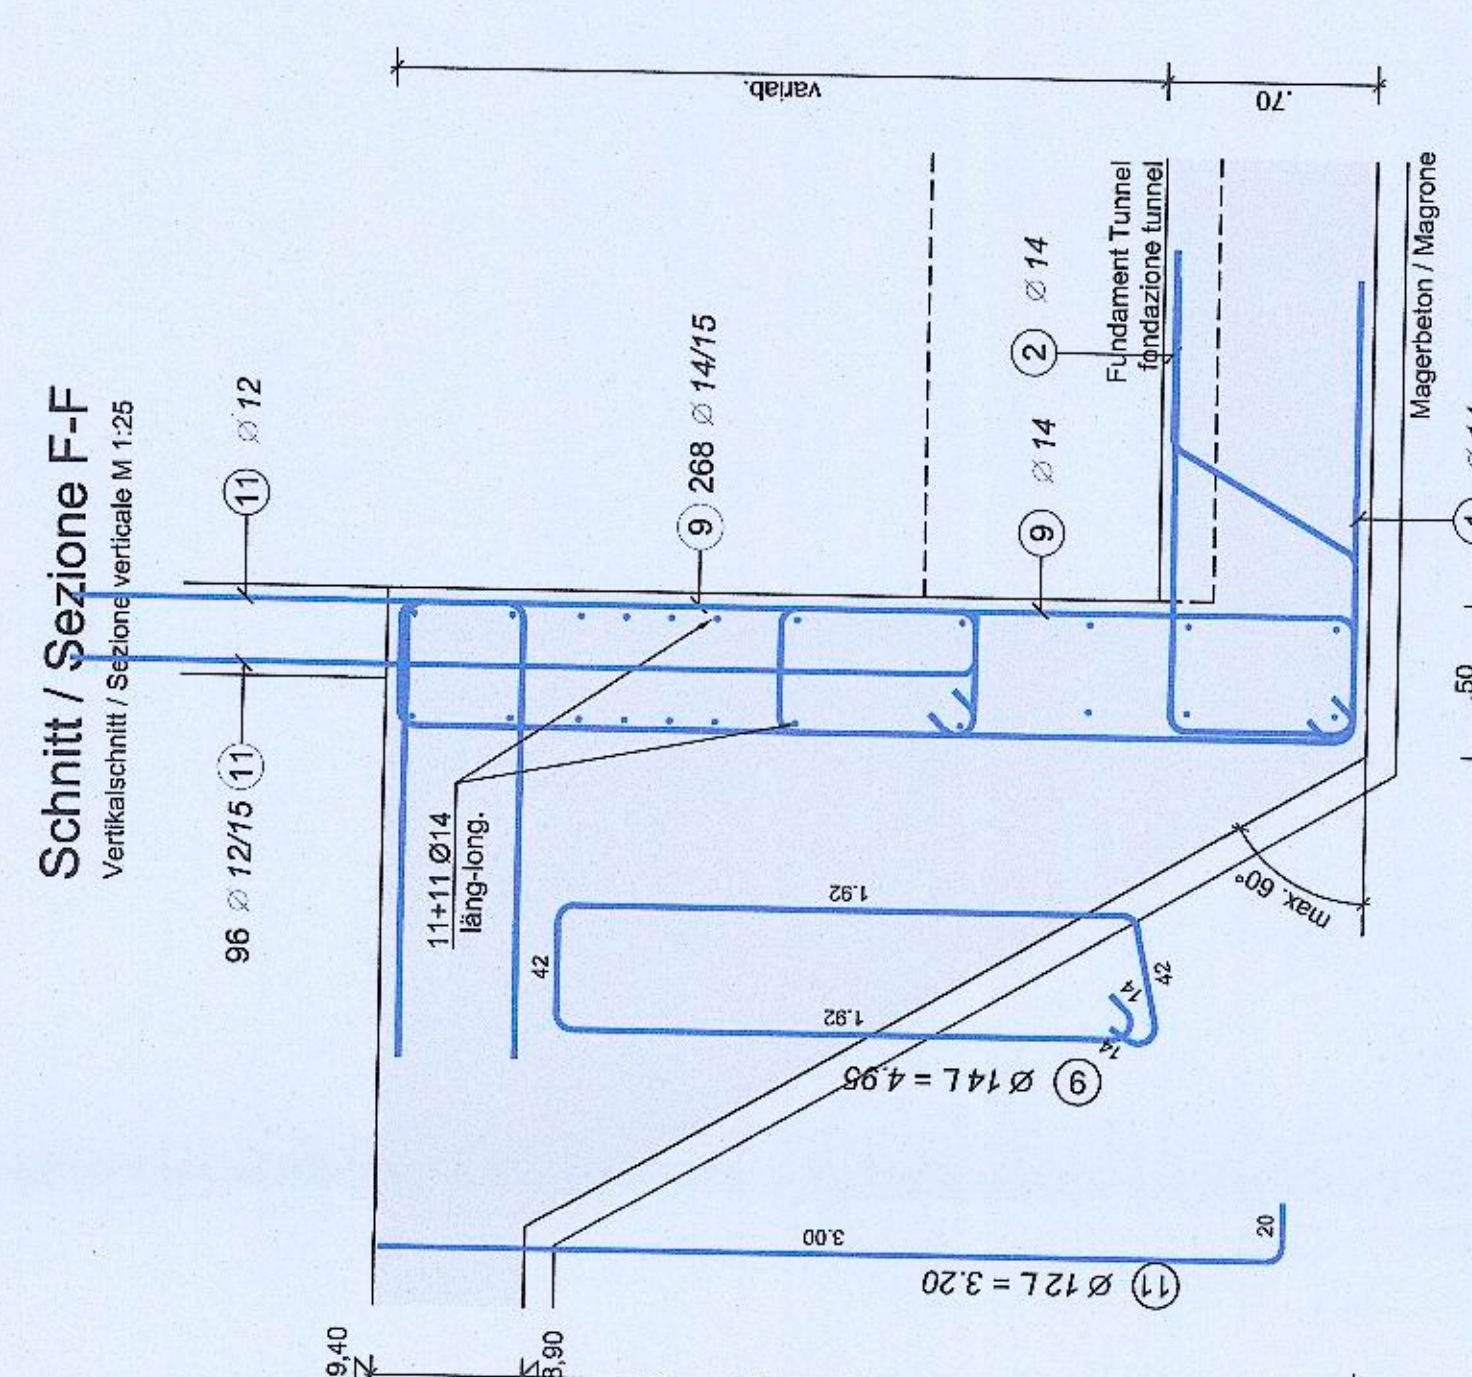
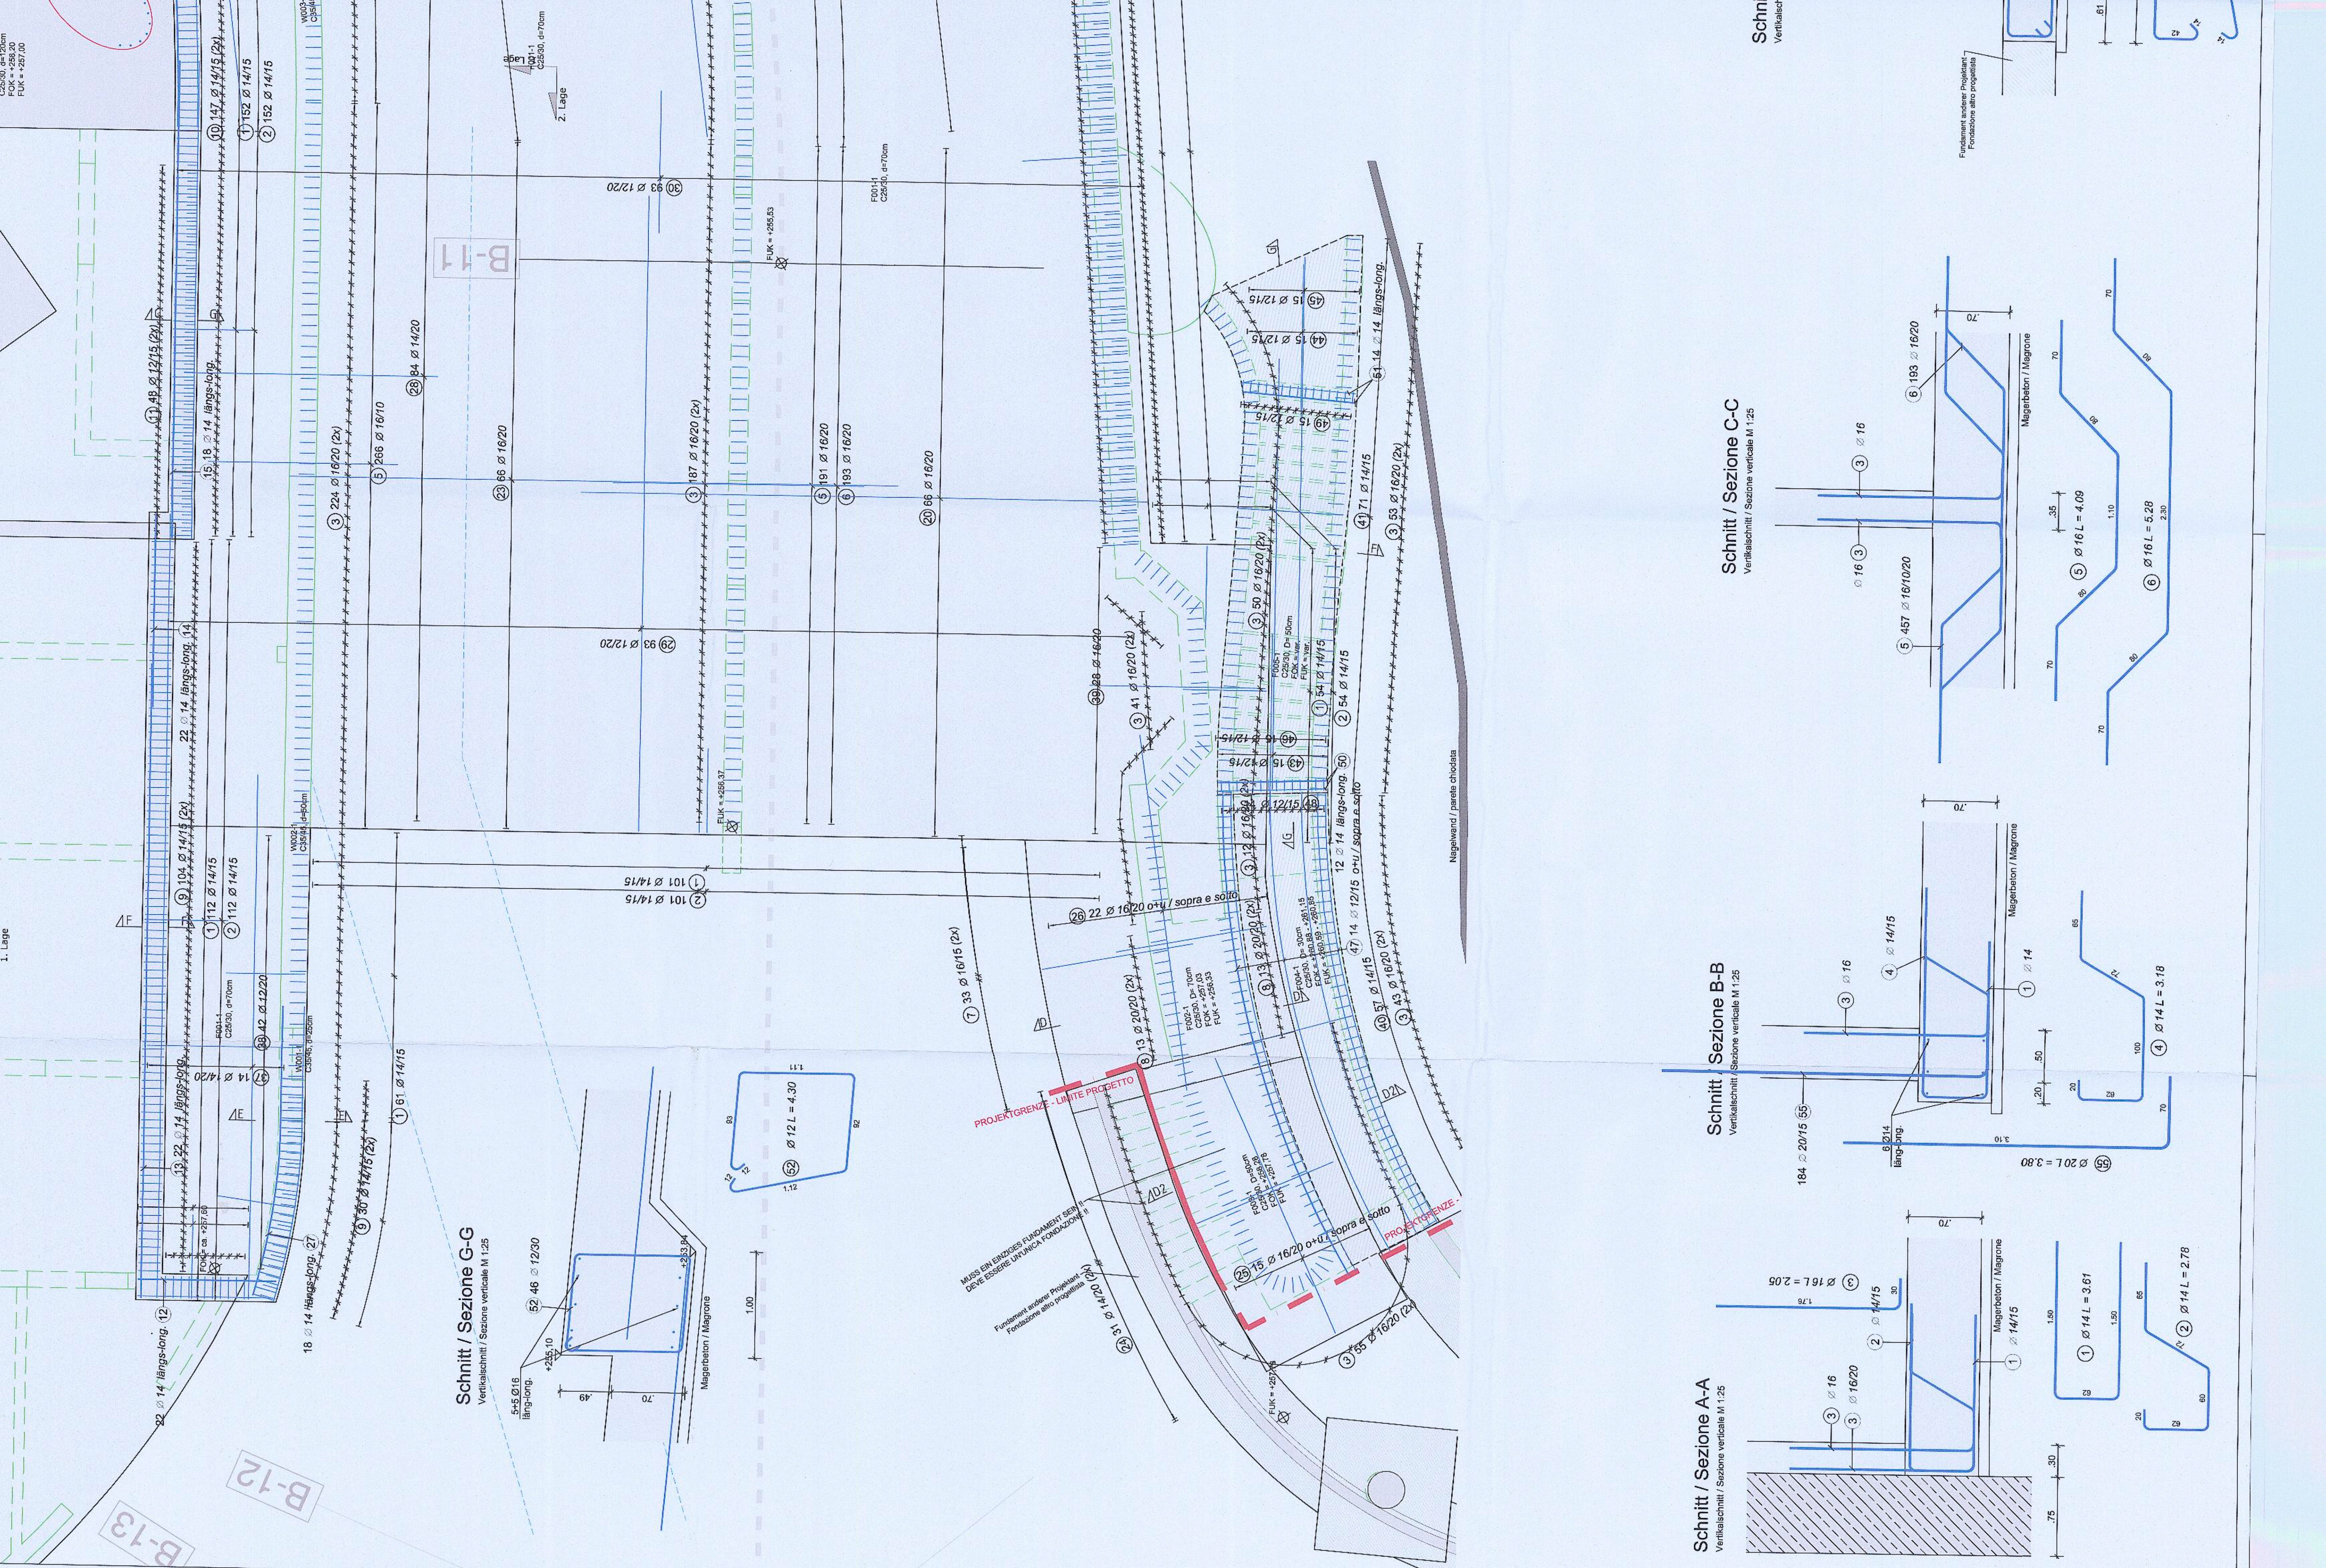
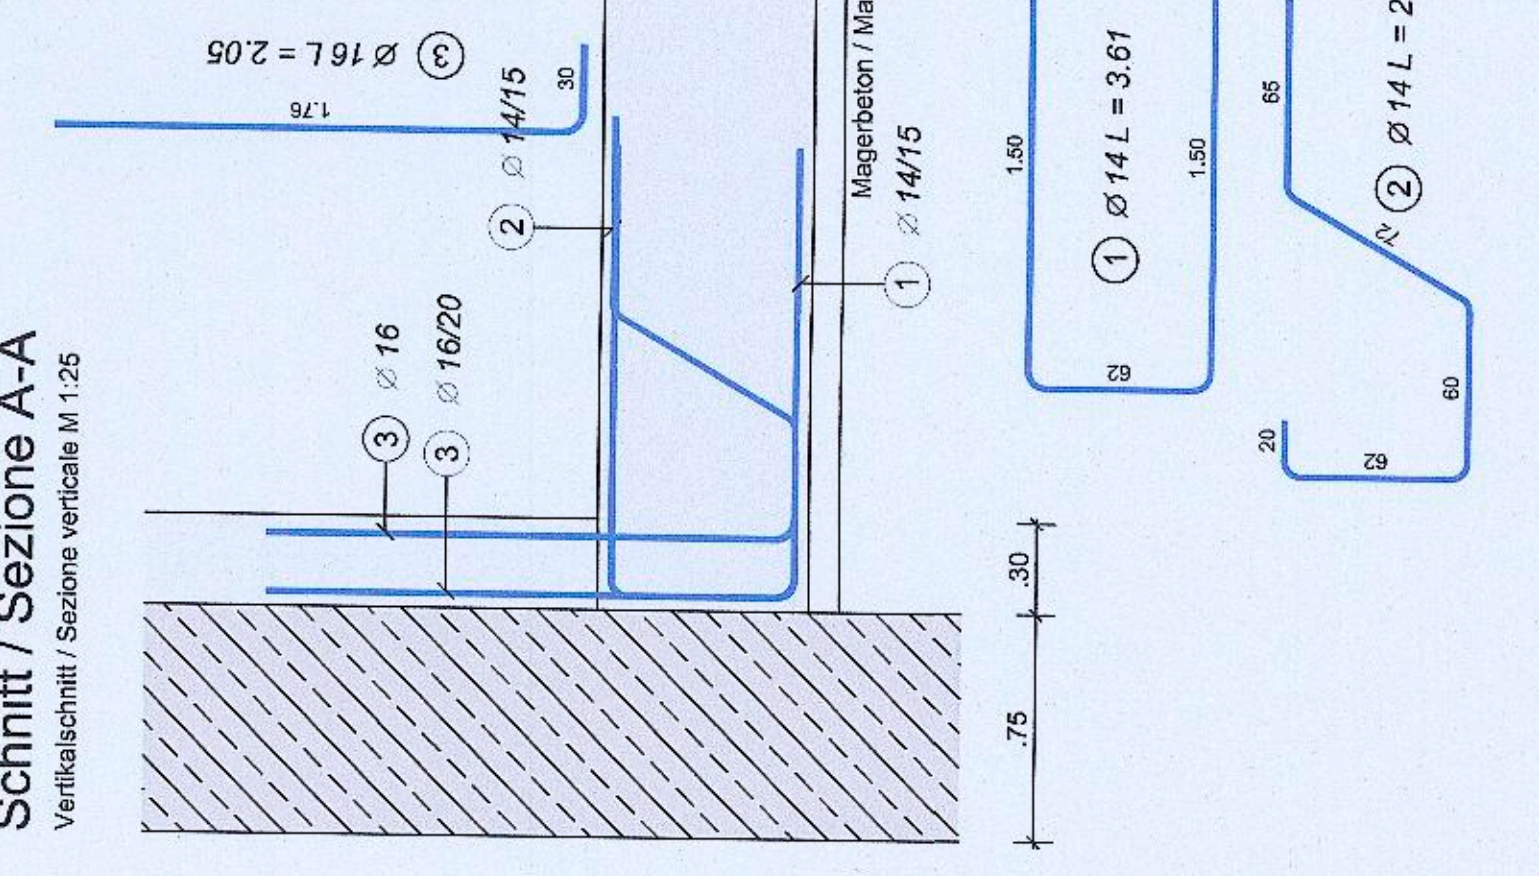
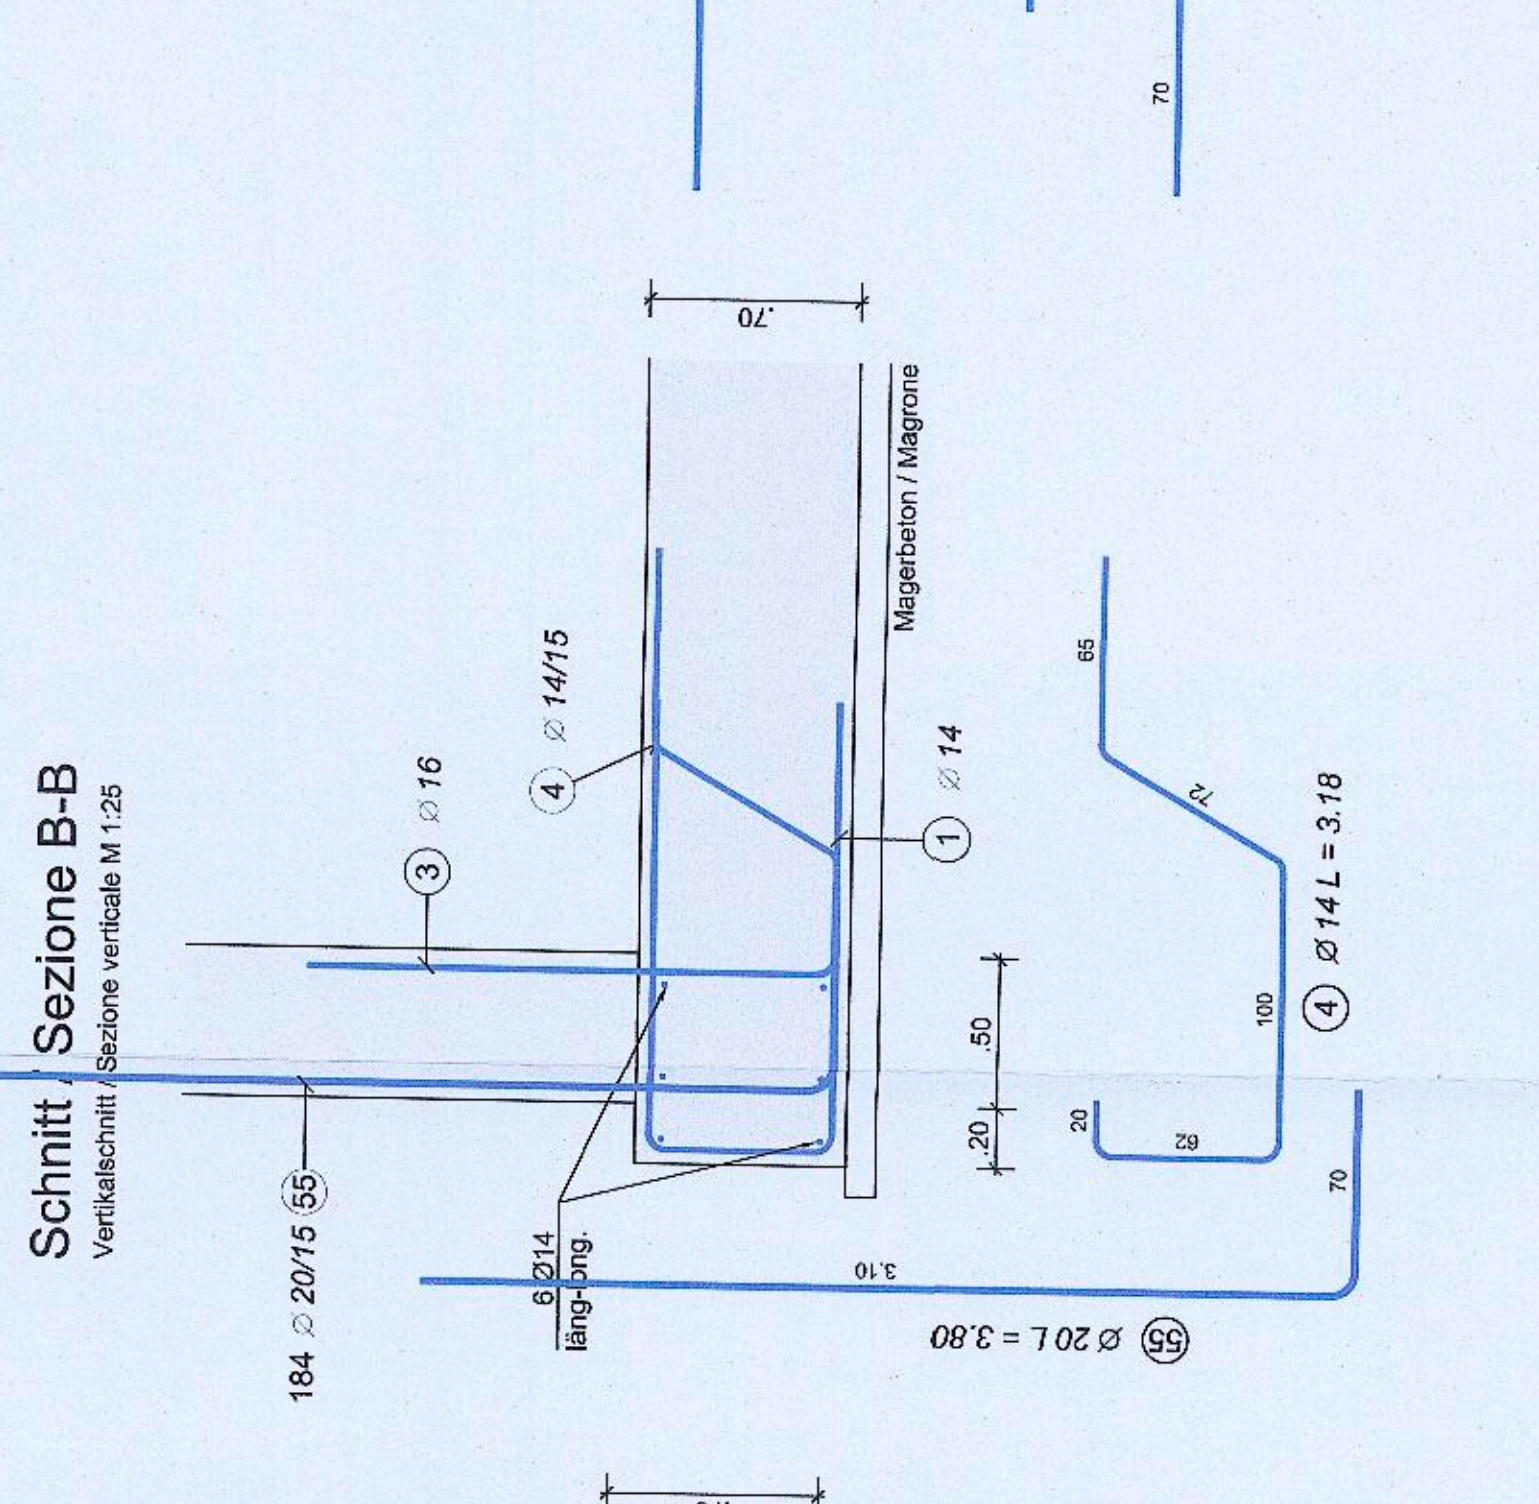
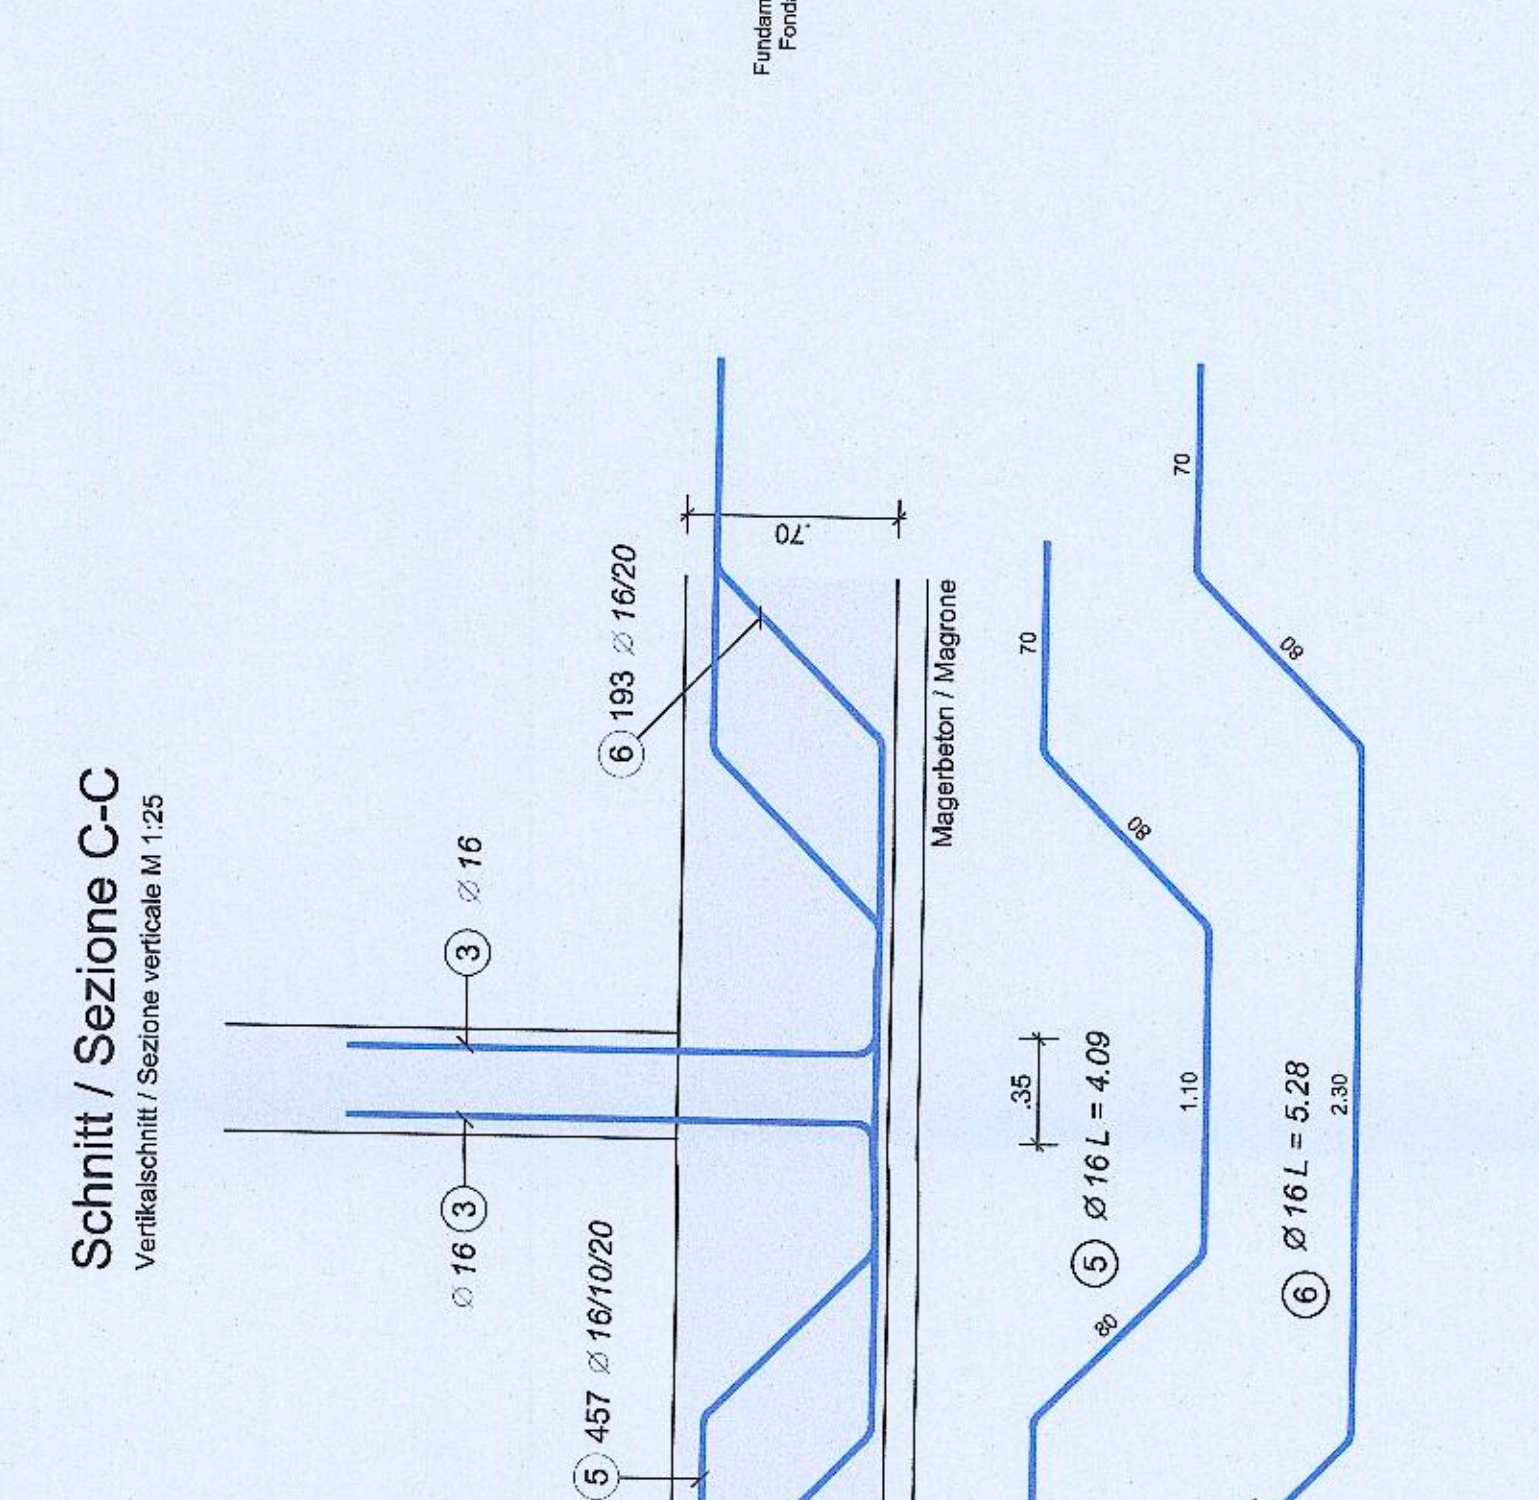
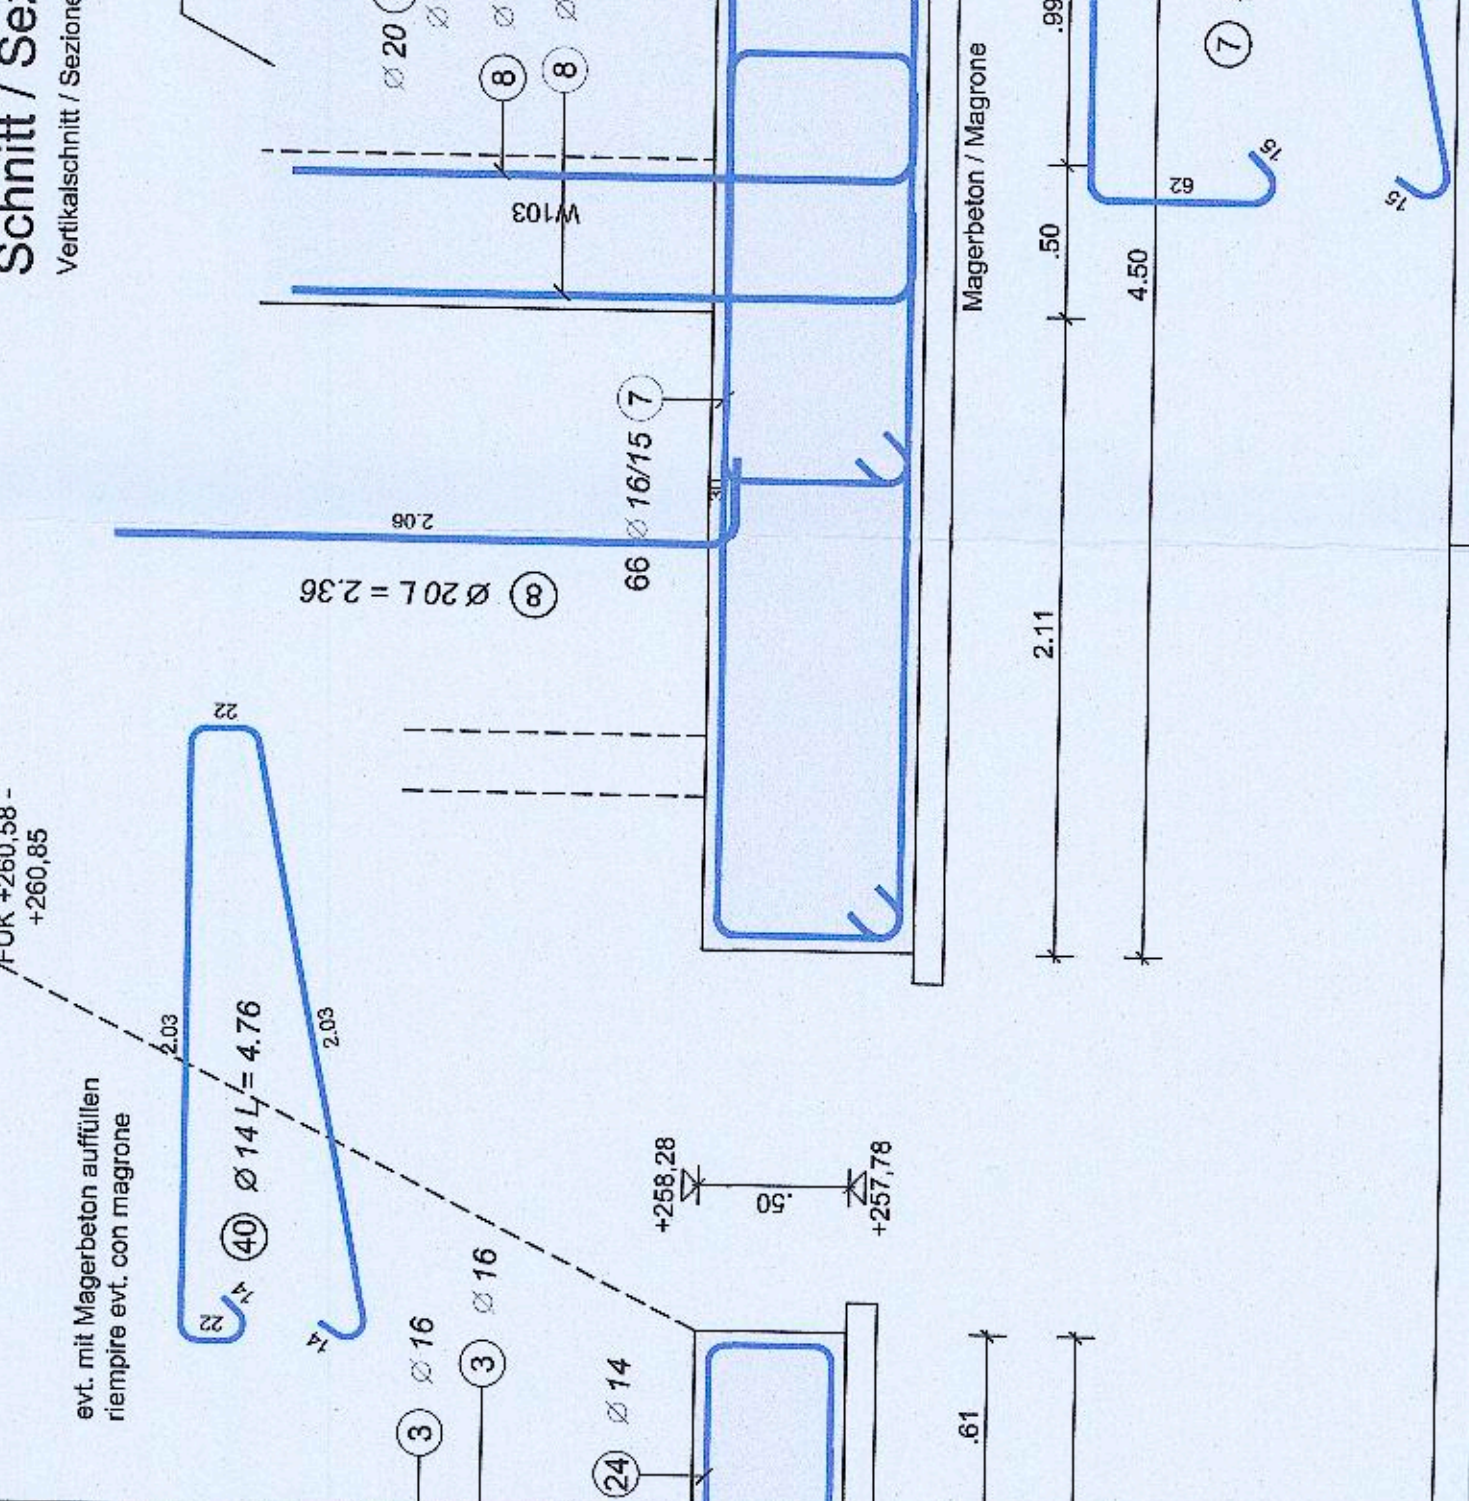
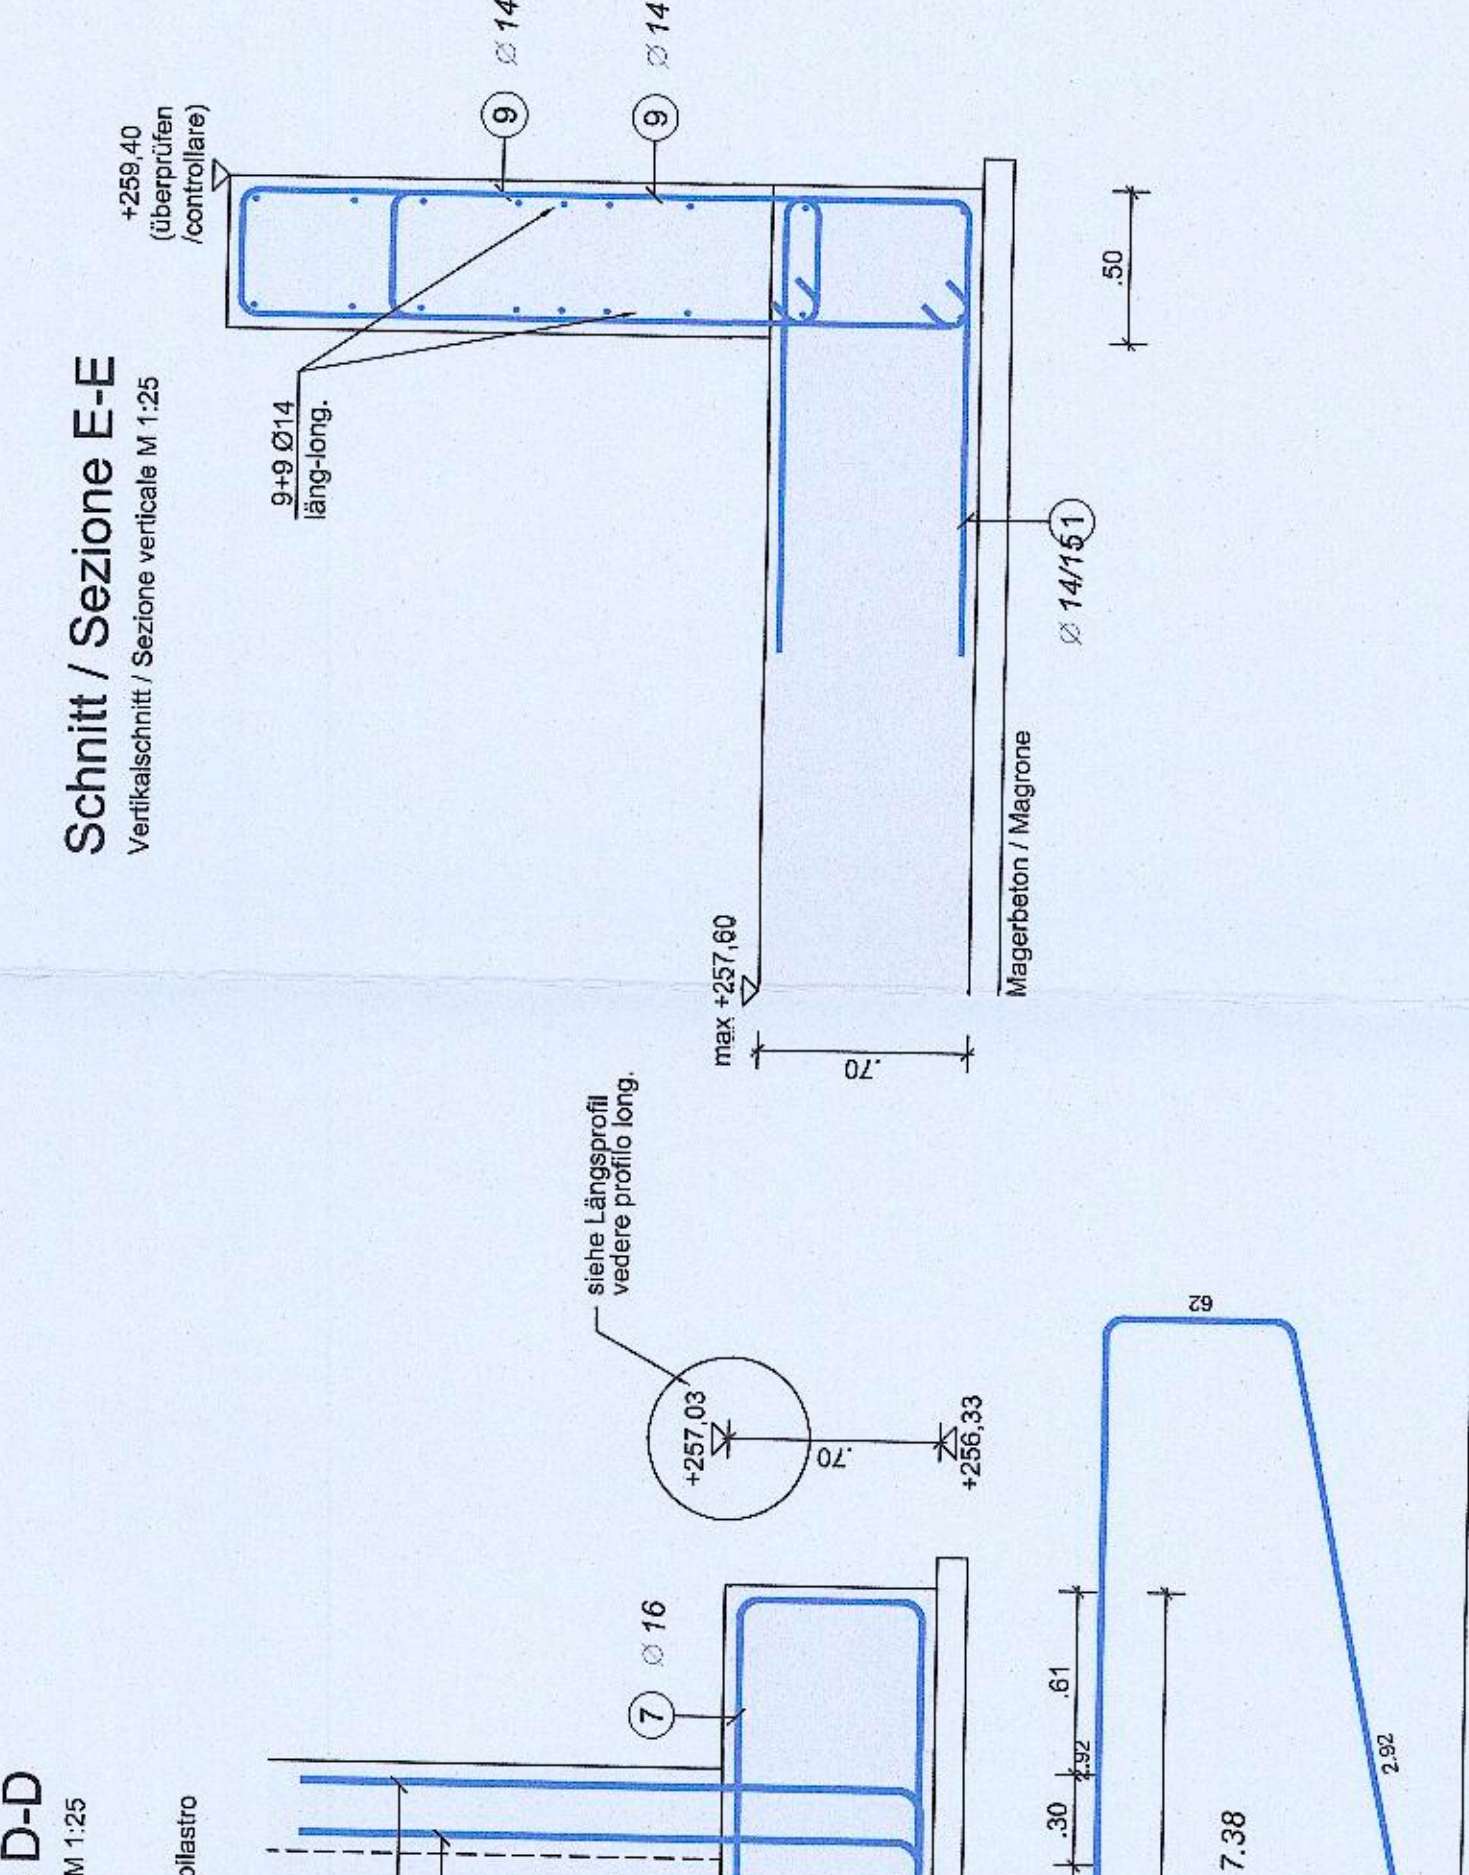
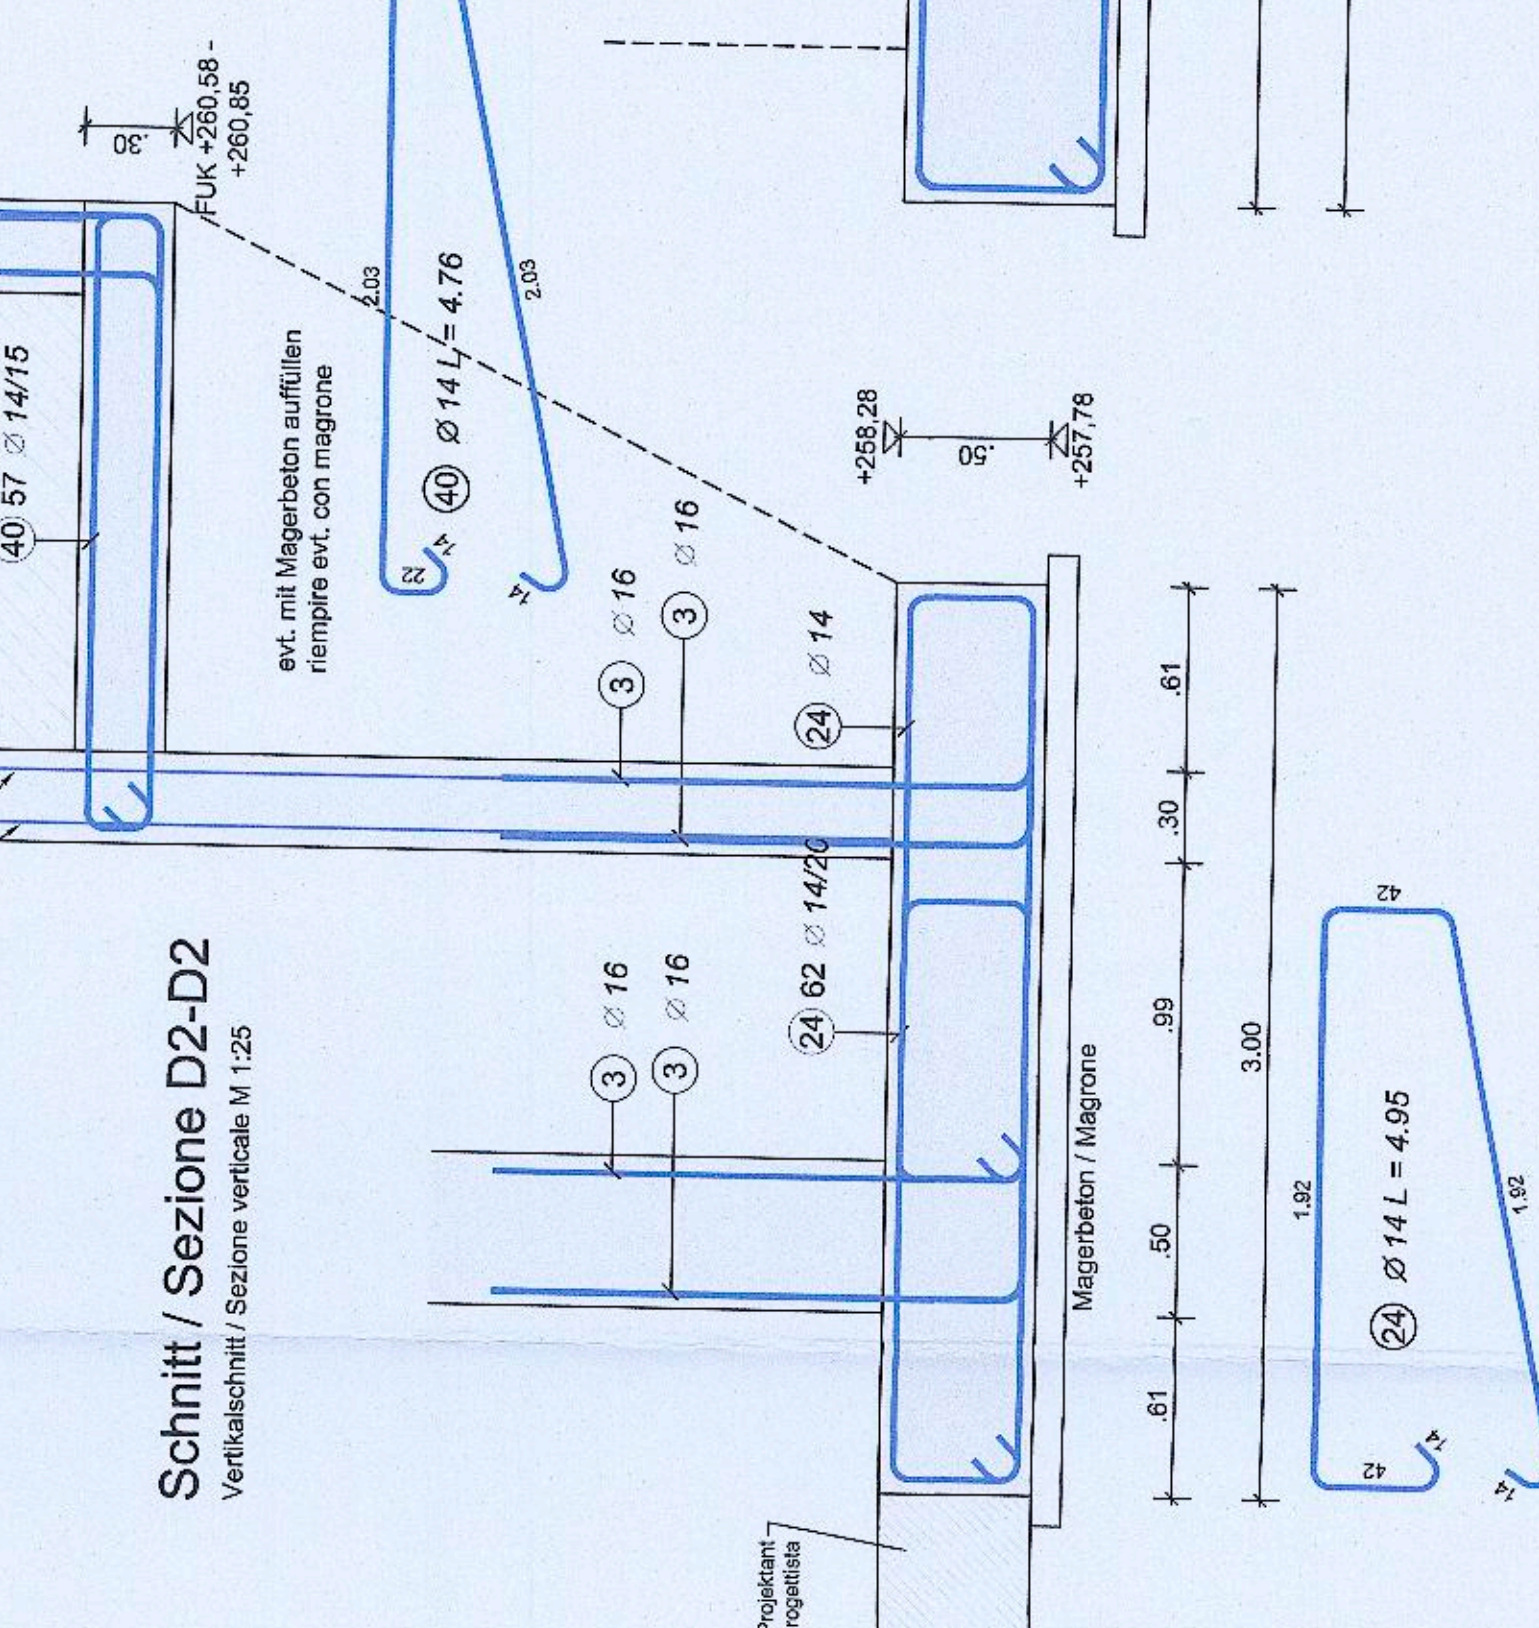
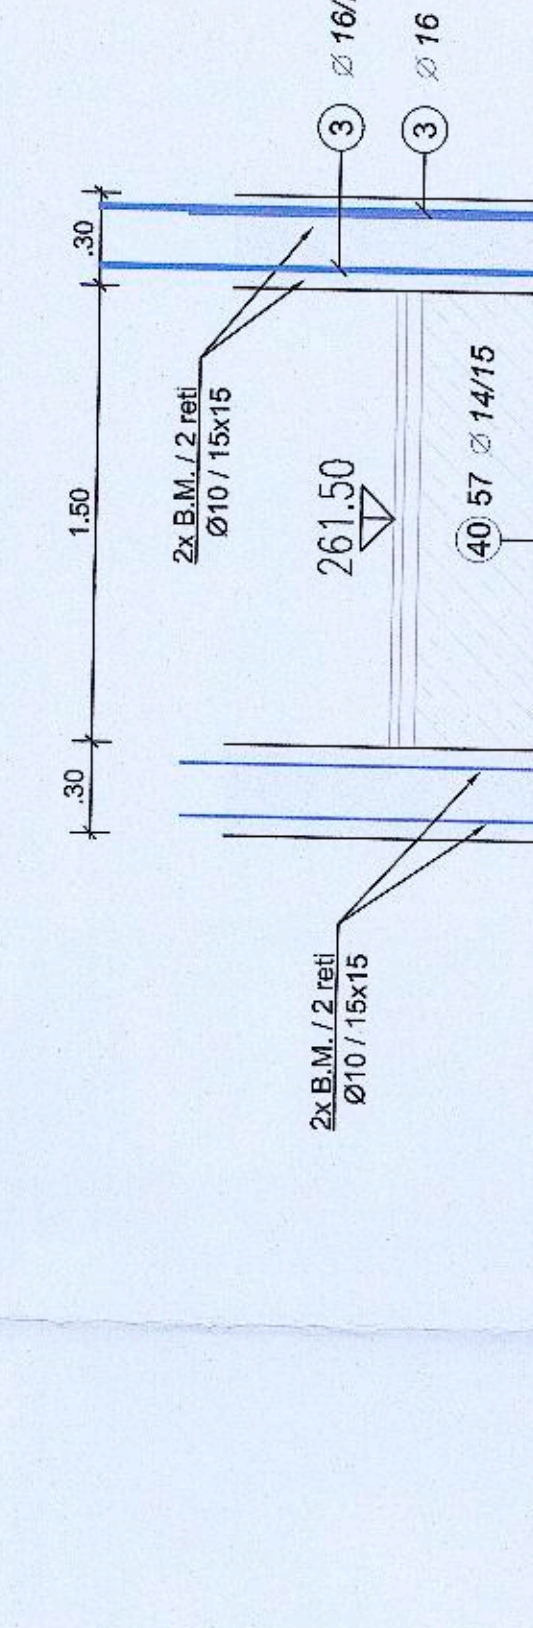
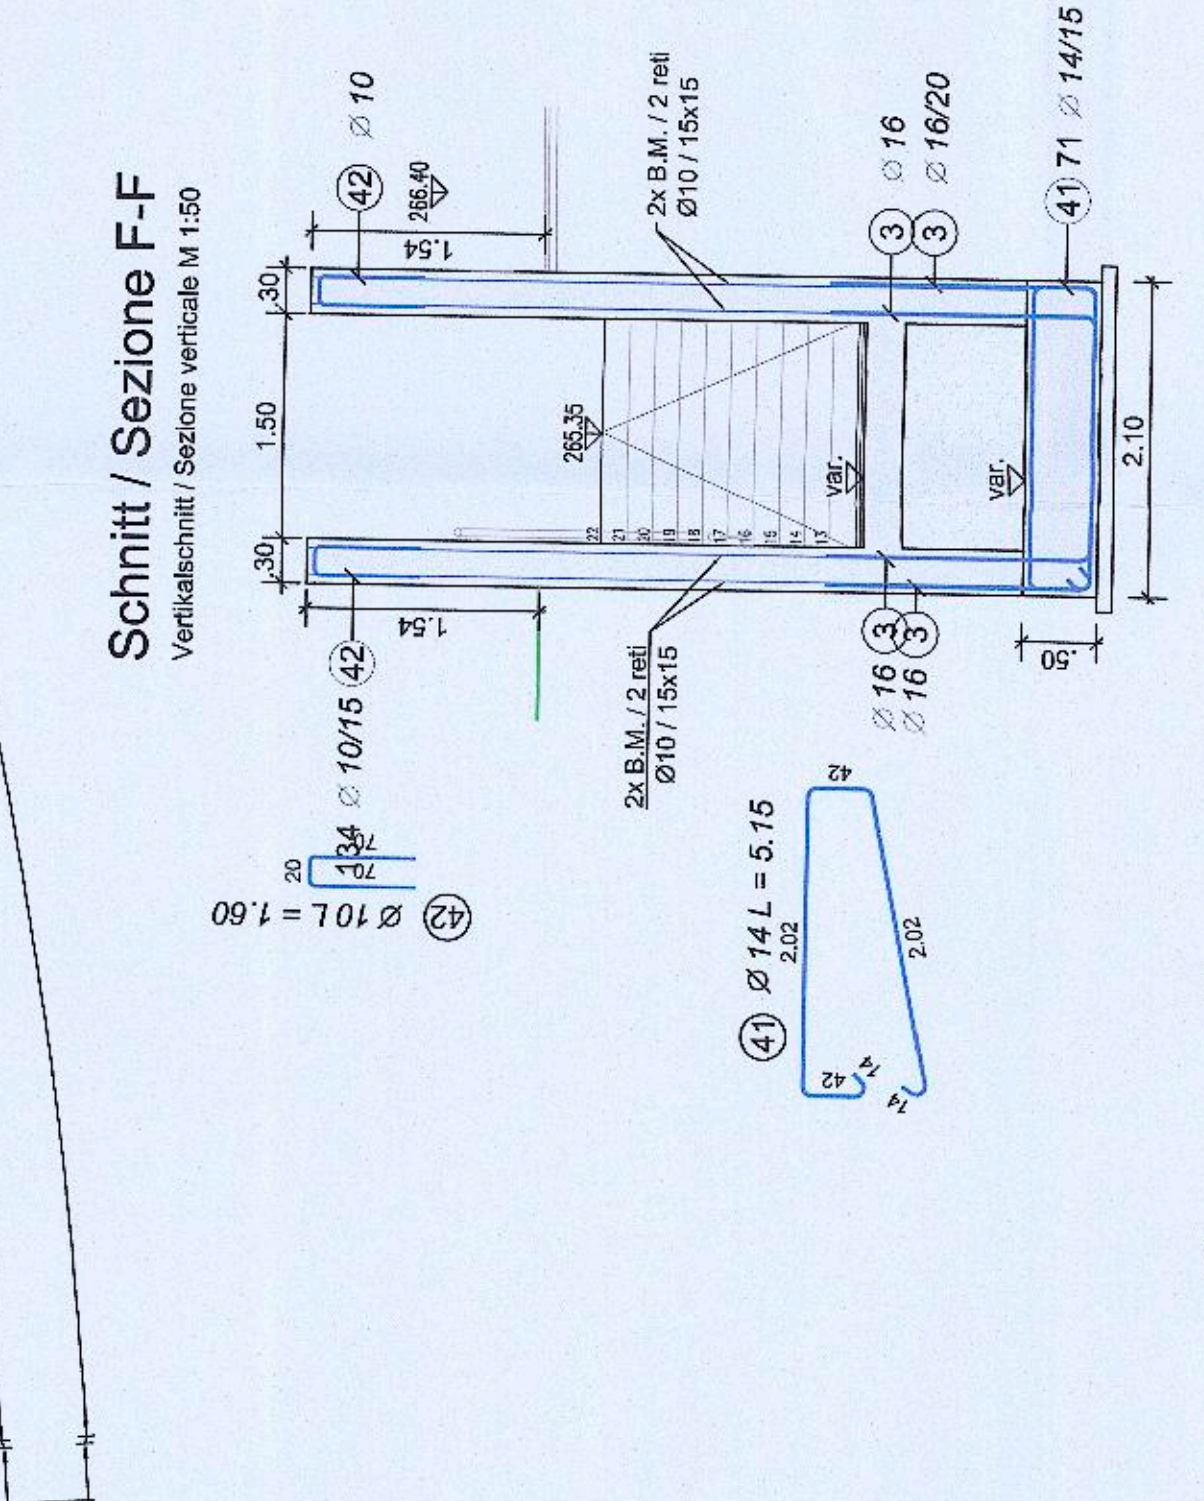
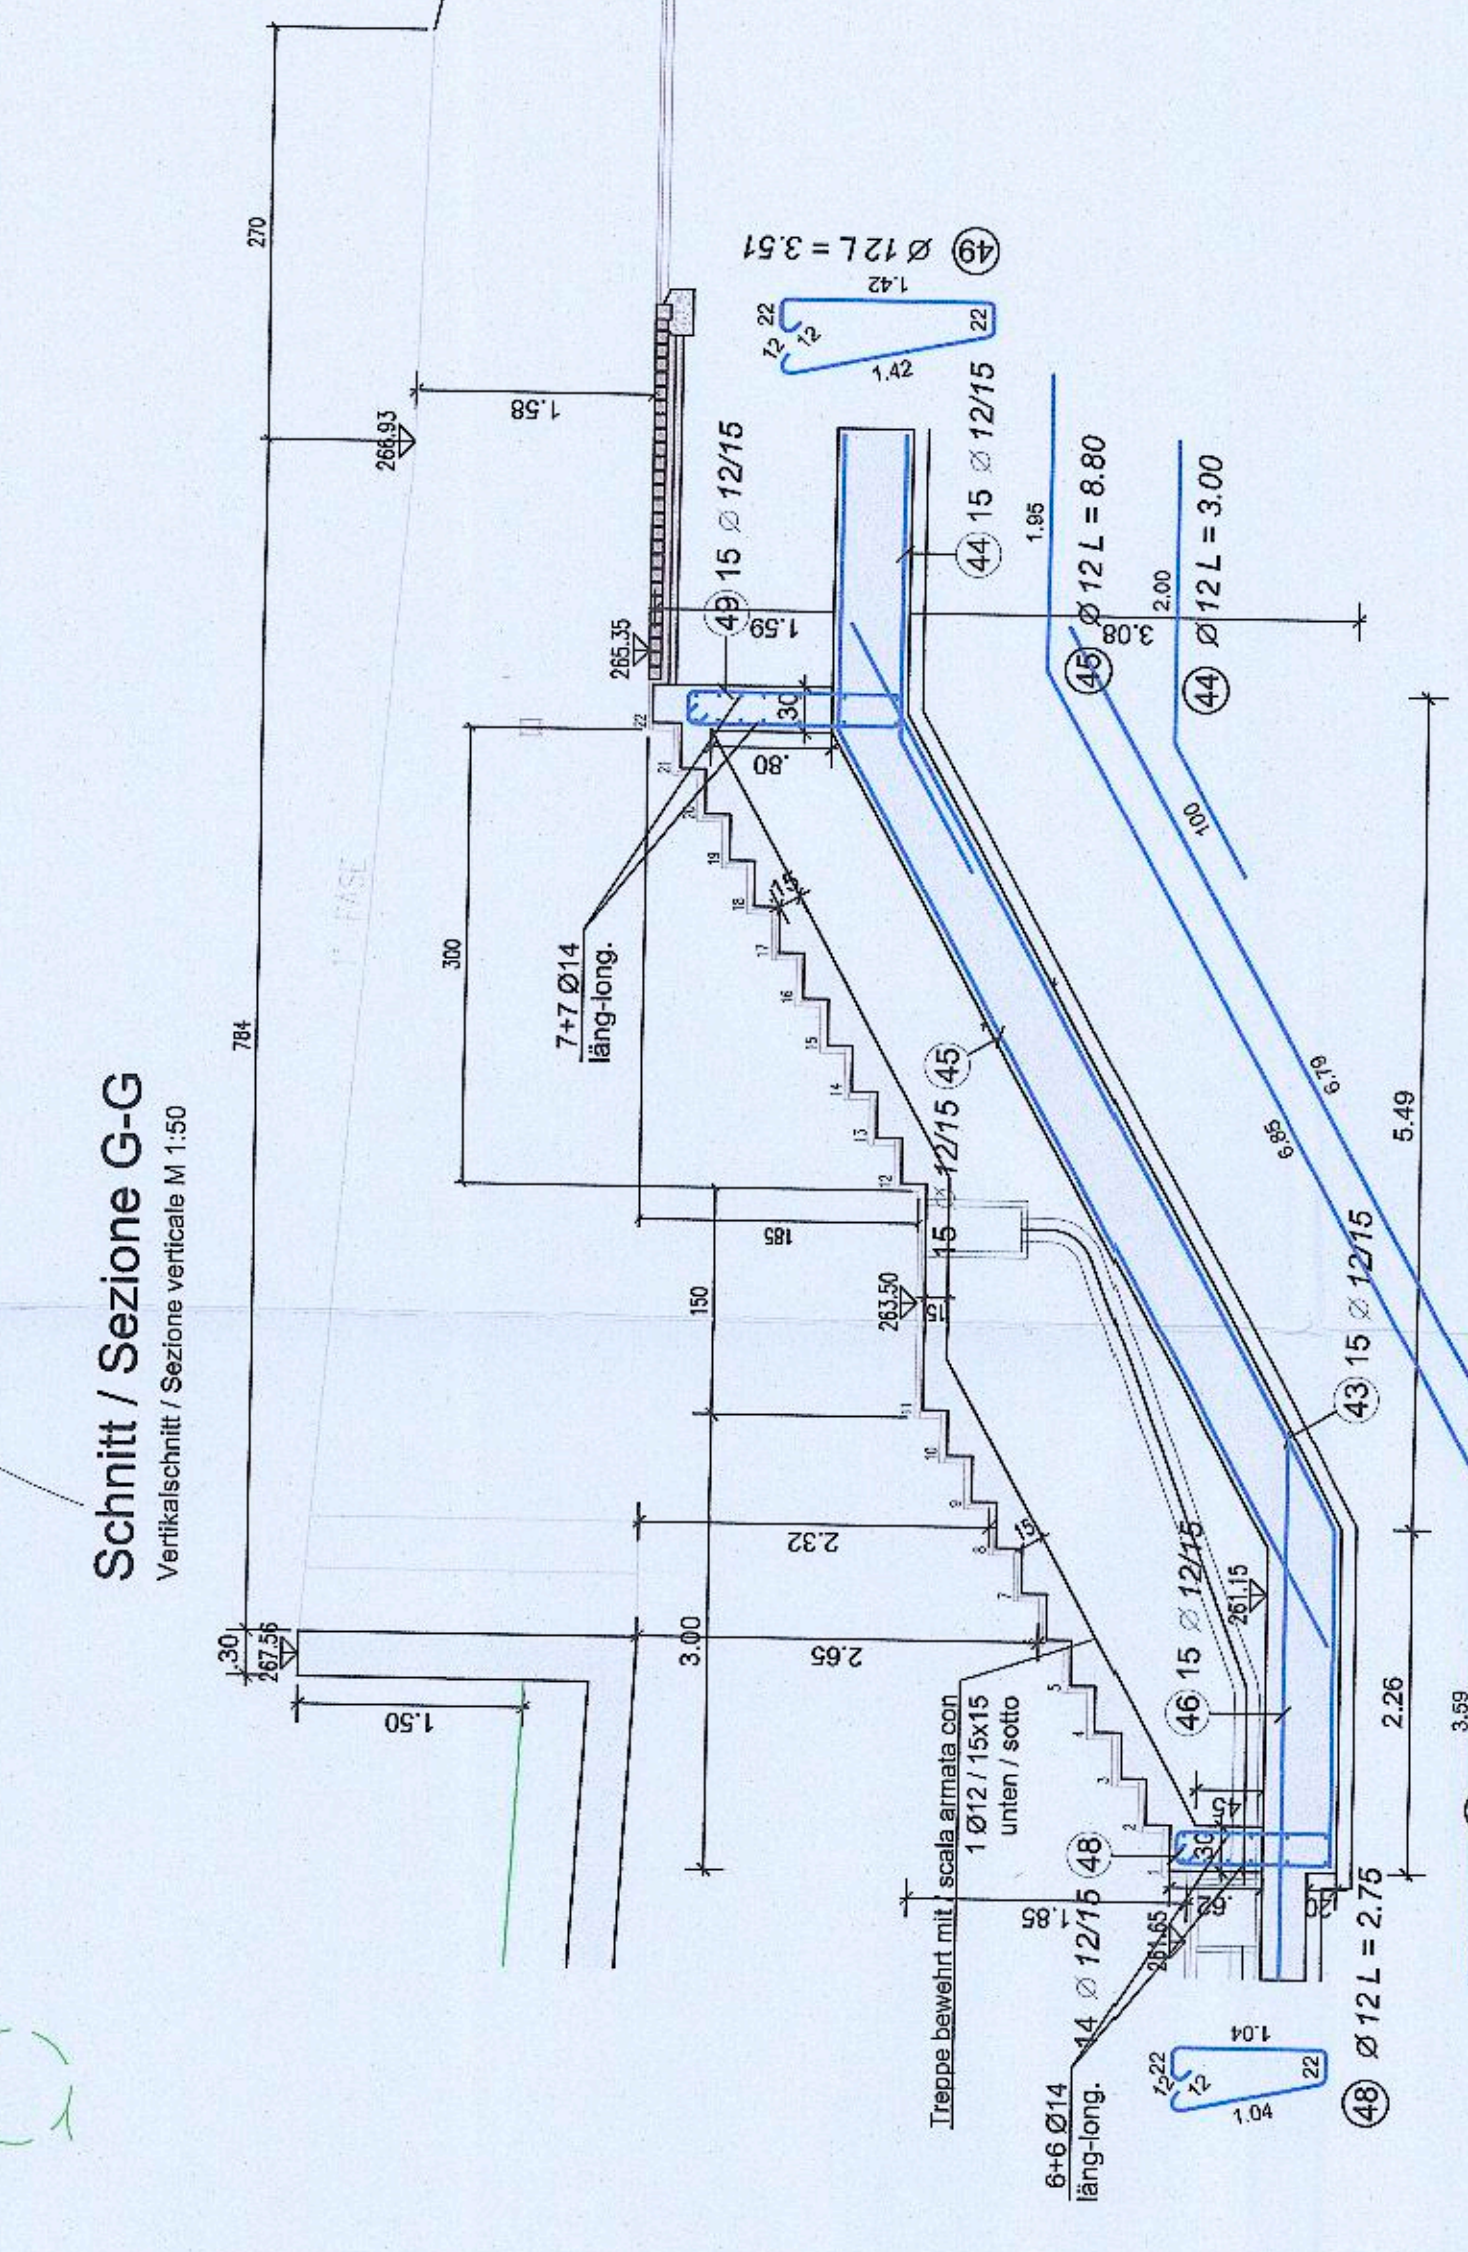


[illegible]

Stabstahl - ferri d'armatura									
Post.	Azienda	Ø	Symbol	Länge (m)	B450C				
					Ø 10	Ø 12	Ø 14	Ø 16	Ø 20
1	797	14	18	3,61			2077,17		
2	494	14	80/50	2,77			1370,05		
3	1580	16	16/50	2,77				3239,00	
4	242	14	80/50	2,03				765,35	
5	457	16	80/50	3,18				1686,65	
6	193	16	70/50	4,09				1018,08	
7	66	16	30/50	7,38				487,09	
8	52	20	30/50	2,35					1272
9	268	14	130/50	4,95			1320,60		
10	294	14	130/50	5,31			1561,14		
11	96	12	30/50	3,20	307,20				
12	22	14	30/50	2,62		57,64			
13	22	14	30/50	12,00	264,00				
14		14	30/50	3,65	80,30				
15	18	14	90/50	9,00	182,00				
16	18	14	60/50	11,98	215,64				
17	18	14	2/3	2,75		48,50			
18	69	16	ans. 110/54	9,81 *			576,98		
19	71	16	ans. 10,52/54	10,31 *			731,05		
20	66	16	ans. 10,33/53	10,82 *	714,12				
21	64	16	ans. 6,67/52	9,76 *	825,32				
22	61	16	ans. 10,7/51,95	11,16 *	860,15				
23	66	16	11/59	11,95			764,94		
24	62	14	130/50	4,85	306,90				
25	30	16	6/57	5,67					
26	44	16	6/57	6,77			175,10		
27	18	14	5/55	4,63		90,64			
28	125	14	3/50	5,53					
29	125	14	4/50	4,62		602,50			
30	177	12	16/50	12,00		2124,00			

[illegible]